

EQ900F eZ.HD Series

1080p Full High Definition

True Day/Night Box Camera

User's Manual



*****Lens not included.***



Copyright © EverFocus Electronics Corp.

Release Date: February 2016

Precautions

Please read this manual first to ensure correct installation and operation. This manual should be retained for future reference. The information in this manual was current when published. The manufacturer reserves the right to revise and improve its products. All specifications are therefore subject to change without notice.

1. Do not install the camera near electric or magnetic fields.

Install the camera away from TV/radio transmitters, magnets, electric motors, transformers and audio speakers, because the electromagnetic fields generated by these devices may distort the video image or otherwise interfere with camera functions.

2. Never disassemble the camera beyond the recommendations in this manual, nor apply materials to it other than those recommended herein.

Improper disassembly or introduction of corrosive materials may result in equipment failure or other damage.

3. Try to avoid pointing the camera toward the sun.

In some circumstances, direct sunlight may cause permanent damage to the sensor and/or internal circuits. It may also create unbalanced illumination that may be beyond the camera's ability to compensate.

4. Keep the power cable away from water and other liquids. Never touch the power cable with wet hands.

Touching a wet power cable with your hands or touching the power cable with wet hands may result in electric shock.

5. Never install the camera in areas exposed to oil, gas or solvents.

Oil, gas or solvents may cause equipment failure, electric shock or, in extreme cases, fire.

6. Cleaning

For cameras with interchangeable lenses, do not touch the surface of the sensor directly with your hands. Use lens tissue or a cotton tipped applicator and ethanol to clean the sensor and the camera lens. Use a damp soft cloth to remove any dirt from the camera body. Do not use complex solvents, or corrosive or abrasive agents to clean any part of the camera.

7. Do not operate the camera beyond the specified temperature, humidity and power source levels. This camera is suitable for indoor operation only.

Use the camera at temperatures within -10°C~50°C (14°F~122°F) and humidity less than 80% ; this device is not rated as submersible. The input power source should be 12VDC or 24VAC.

The use of a properly fused or "Class 2 Limited Power Source" power supply is highly recommended.

8. Mounting

Select a solid mounting surface that will support the weight of the camera and any additional loading from wind, snow, ice or other factors. Securely attach the camera to the mounting surface using screws and anchors that will properly support the camera. If necessary, (e.g. when mounting the camera to a drop ceiling, or unsupported ceiling) use a safety wire to provide additional support for the camera.

Safety Notice

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



ATTENTION! This is a class A product which may cause radio interference in a domestic environment; in this case, the user may be urged to take adequate measures.



This Product is RoHS compliant.



WEEE

Your EverFocus product is designed and manufactured with high quality materials and components which can be recycled and reused. This symbol means that electrical and electronic equipment, at their end-of-life, should be disposed of separately from your household waste. Please, dispose of this equipment at your local community waste collection/recycling centre. In the European Union there are separate collection systems for used electrical and electronic product.

Please, help us to conserve the environment we live in!

Contents

1.	Introduction	1
1.1	Packing List.....	1
1.2	Features.....	1
2.	Overview	2
3.	Installation	3
3.1	Lens Installation and Adjustment	3
3.2	Top / Bottom-Mount	3
4.	Basic Connection	4
5.	OSD Menu Structure	5
6.	Specifications	9

1. Introduction

The EQ900F is a box camera equipped with 1/2.9" SONY 2.24M pixels CMOS to deliver 1080p high resolution video. The camera delivers vastly superior image quality compared with traditional CCTV images. This superior resolution not only captures more critical evidentiary information, but the inherent ability for video also extends the area of coverage, expedites completion of investigations, resolves complaints and reduces both capital and operational costs.

The EQ900F provides 3D Noise Reduction to improve picture clarity while enabling DVRs to improve disk storage utilization. Full suite of OSD menu options controlled from the built-in function buttons. Digital Wide Dynamic Range expansion to deliver properly exposed images despite bright light sources, deep shadows and/or unbalanced lighting in the same scene. The camera allows flexible choices of manual & DC iris control lenses with C/CS mount for outstanding coverage in a wide range of demanding surveillance environments while delivering stunning image quality. The EQ900F supports both NTSC and PAL scanning systems, which can be switched via OSD.


1.1 Packing List

- Camera Body x 1
- DC Power Pigtail Cable x 1
- User Manual x 1
- Hexagon Wrench x 1
- C-mount Lens Adapter x 1
- Warning Paper x 1

1.2 Features

- 1080p full HD with high flexibility and performance for astounding image
- 1/2.9" Sony 2.24M pixels CMOS sensor, delivering amazing high sensitivity
- D-WDR to improve the visibility under high contrast scene
- 3D-Noise Reduction ensures less blurry moving subjects, vivid and high SN ratio images even under low light environments
- Supports 1080p, 720p & 960H analog signal output, which can be easily switched using OSD Joystick
- eZ.Controller function: Control camera OSD settings and PTZ operation directly from DVR end

2. Overview

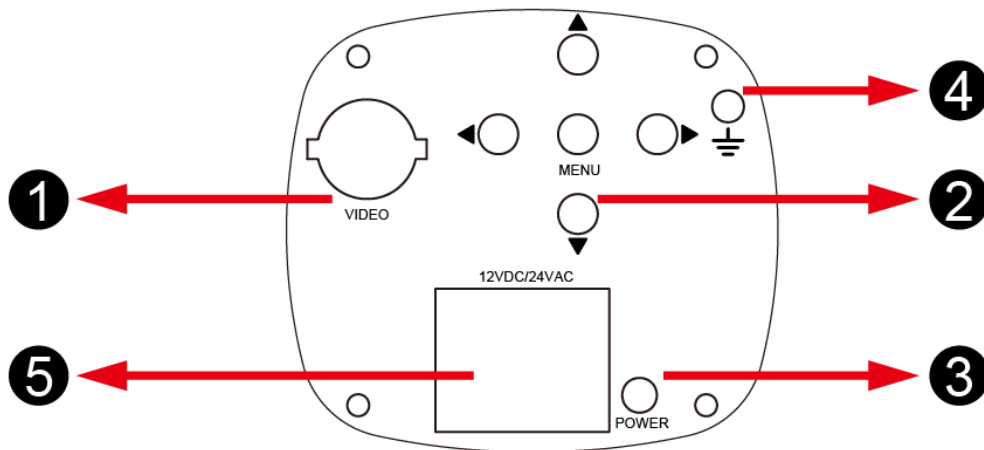

No.	Name	Descriptions
1	Video Output	1080p, 720p and 960H output, using a 75 Ohm BNC-type coaxial cable.
2	OSD Menu	Use the function buttons to configure the settings in the OSD menu.
3	Power LED	Glow red then power is present.
4	Grounding Stud	Ensure a good grounding when used.
5	Power Input Terminal	Connect to 12VDC/24VAC power source. Note: The red and black wires of the DC Power Pigtail Cable can be connected to either pin of the Power Input Terminal without considering the polarity.

3. Installation

3.1 Lens Installation and Adjustment

You can install either a CS-mount or a C-mount lens into the camera. It is recommended to use a lens with aperture ratio of F/1.2 or lower. Please refer to the following steps.

CS-Mount Lens:

1. Remove the **Cover Cap** from the **Camera Body**.
2. Install the lens into the **Camera Body**.
3. Adjust the lens using the Focus / Zoom Screws.

C-Mount Lens:

1. Remove the **Cover Cap** from the **Camera Body**.
2. Install the lens into the **Camera Body** using the supplied **C-Mount Lens Adapter**.
3. Adjust the lens using the Focus / Zoom Screws.

If you are using a **DC Auto Iris lens**:

1. Remove the **Cover Cap** from the **Camera Body**.
2. Install the lens into the **Camera Body**.
3. Connect the DC Iris Cable to the DC Auto Iris Lens Connector.


Warning: Installing a C-mount lens without the C-mount lens adapter may damage the camera sensor.

3.2 Top / Bottom-Mount

You can use a mounting bracket and screw it on the top of the **Camera Body** to suspend the camera, or on the bottom of the **Camera Body** to support the camera.

4. Basic Connection

1. Connect the camera to a 12VDC or 24VAC power source using the supplied **DC Power Pigtail Cable**. The power LED will be lit in red.
2. Configure the OSD Menu, using the function button.

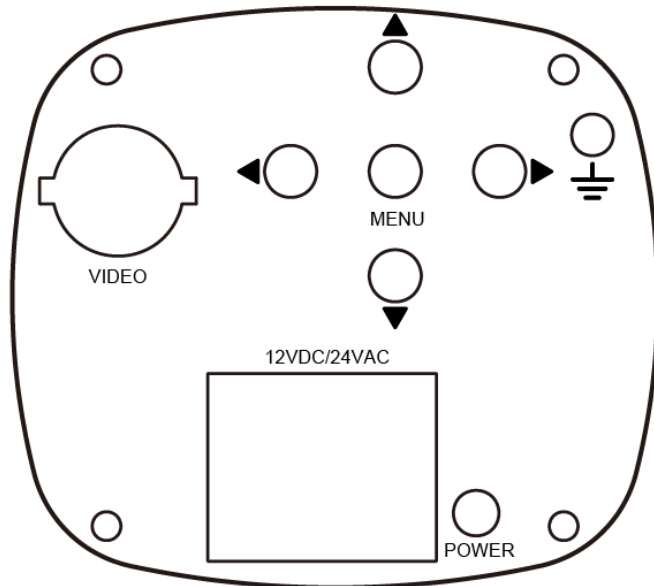

Note: The function button is using to control direction, and also to switch video format and video output. Please follow the detailed instruction as below to switch the camera to:

- ✧ Switch between 1080p and 720p (Default, 1080p): Press Upward for 5 Seconds
 - ✧ Switch from HD (1080p / 720p) to 960H: Press Left for 5 Seconds
 - ✧ Switch from 960H to HD (1080p / 720p): Press Right for 5 Seconds
 - ✧ Switch between NTSC and PAL: Press Downward for 5 Seconds
3. Connect the camera to an AHD DVR or a monitor for setting image aim and focus before mounting the camera.

5. OSD Menu Structure

You can use the Joystick on the rear panel of the camera to configure camera settings in the OSD menu. For details on the OSD menu structure as below:

No.	Main	Sub Menu	Sub Menu / Function				
1	Lens	DC	Mode	Indoor			
				Outdoor	Min Shu.	NTSC: 1/30	
						PAL: 1/25	
					Max. Shu.	NTSC: 1/60,FLK,1/240, 1/480,1/1000, 1/2000,1/5000, 1/10000, 1/50000	
						PAL: 1/50,FLK,1/200, 1/400,1/1000, 1/2000,1/5000, 1/10000, 1/50000	
		Iris Speed	0 – 15(0)				
Manual							
2	Exposure	Shutter	NTSC: 1/30, 1/60, FLK, 1/240, 1/480, 1/1000, 1/2000, 1/5000, 1/10000, 1/50000, X2, X4, X6, X8, X10, X15, X20, X25, X30, Auto				
			PAL: 1/25, 1/50, FLK, 1/200, 1/400, 1/1000, 1/2000, 1/5000, 1/10000, 1/50000, X2, X4, X6, X8, X10, X15, X20, X25, X30, Auto				
		AGC	0 – 15(15)				
		Sens-up	Off				
			Auto	Sens-up	X2, X4, X6, X8, X10, X15, X20, X25, X30		
		Brightness	1-100(40)				
		D-WDR	Off				
			On	Level	0-8(8)		
			Auto				
		Defog	Off				
			Auto	Pos/Size	Position, Size, ↑, ↓, →, ←		
				Gradation	0-2(0)		
				Default			
3	Backlight	Off					
		BLC	Level	Middle, High, Low			
			Area	Position, Size, ↑, ↓, →, ←			
			Default				

		HSBLC	Select	Area1, Area2, Area3, Area4			
			Display	Off			
				On	Position, Size, ↑, ↓, →, ←		
			Black Mask	On/Off			
			Level	0-100(70)			
			Model	All Day			
				Night	AGC Level	0-255(48)	
			Default				
4	White Balance	ATW					
		AWC→SET					
		Indoor					
		Outdoor					
		Manual	Blue		1-500(50)		
			Red		0-100(50)		
		AWB					
5	Day & Night	Ext	D→N(Delay)		0-60(1)		
			N→D(Delay)		0-60(1)		
		Auto	D→N(AGC)		1-255(240)		
			D→N(Delay)		0-60(1)		
			N→D(AGC)		1-255(100)		
			N→D(Delay)		0-60(3)		
		Color					
		B/W	Burst	Off/On			
			IR Smart	Off			
				On	Level	0-15(4)	
			Area	Position, Size, ↑, ↓, →, ←			
6	NR	2DNR	Middle/Low/Off/High				
		3DNR	Middle/Low/Off/High				
7	Special	Cam Title	Off				
			On	0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZ▶◀← ↑ ↓ () ^ _ ■ /=&:~,.			
		D-effect	Freeze	Off/On			
			Mirror	Off, Mirror, V-flip, Rotate			
			Neg. Image	Off/On			
		Motion	Off				

			On	Select	Area1,Area2,Area3,Area4			
				Display	On	Position, Size, ↑, ↓, →, ←		
					Off			
				Sensitivity	0-100(64)			
				Color	Green, Blue, White, Red			
				Trans	1.00,0.75,0.50, 0.25			
				Alarm	View Type	Off, Block, Outline, All		
					OSD View	On/Off		
					Alarm Out	On/Off		
					Alarm Sig	High, Low		
					Time	1-15(3)		
				Default				
		Privacy	Off					
			On	Select	Area1,Area2,Area3,Area4			
				Display	Off			
					Color	Position, Size, ↑, ↓, →, ←		
					Mosaic	Position, Size, ↑, ↓, →, ←		
					Inv	Position, Size, ↑, ↓, →, ←		
				Color	White, Black, Red, Blue			
				Trans	1.00,0.75,0.50,0.25			
				Default				
		Language	ENG/CHN1/CHN2/GER/FRA/ITA/SPA/POL/RUS/POR/NED/TUR					
		Defect	Live DPC	Off				
				On	AGC level	0-255(64)		
					Level	0-100(100)		
			White DPC	On	Off			
					Pos/Size	Position, Size, ↑, ↓, →, ←		
						Start		Close the iris then press
						DPC View		Off/On
						Level		0-60(15)
						AGC		0-14(14)
						Sens-up		x2, x4, x6, x8,x10, x15, x20, x25, x30
			Black DPC	Off				
				On	Pos/Size	Position, Size, ↑, ↓, →, ←		
					Start	Press Enter		

					DPC View	Off/On
					Level	0-100(100)
		RS485	CAM ID		0-255(1)	
			ID Display		Off/On	
			Baud Rate		2400,4800,9600,19200 ,38400	
8	Adjust	Sharpness	Off			
			Auto	Level	0-10(6)	
				Start AGC	0-255(120)	
				End AGC	0-255(255)	
			CRT	Blue Gain	0-100(60)	
				Red Gain	0-100(60)	
			LCD	Gamma	User,0.45,0.50,0.55,0.60,0.65,0.70,0.75,0.80,0.85,0.90,0.95,1.00	
				Blue Gain	0-100(50)	
				Red Gain	0-100(50)	
		LSC	Off/On			
		Video. Out	PAL/NTSC			
9	Exit		Save& END /Reset/Not Saved			

6. Specifications

P/N	EQ900F
Pickup Device	1/2.9" SONY 2.24M pixels CMOS
Video Format	NTSC and PAL(can be switched via OSD)
Effective Pixels	1920 (H)1080 (V)
Scanning System	Progressive Scan
Sensitivity	0.05lux.
S/N Ratio	Over48 dB (AGC OFF)
Electronic Shutter	AUTO, Manual (X30~1/ 50000), FLK
Video Output	BNC 1.0Vp-p 75Ω
Gamma Correction	0.45
Lens Type	C/CS Mount (lens sold separately)
BLC	OFF/BLC/HS BLC Selectable
AGC	0~15 Levels
White Balance	ATW/AWC-SET/INDOOR/OUTDOOR/MANUAL/AWB
Sync Mode	Internal
Day/Night	Ext, Auto, Color, B/W
UTC Function	Supported
OSD Languages	12-Language
DNR	2DNR/3DNR, Off
DEFOG	Off/Auto
D-WDR	On/Off/Auto
Sens-up	Off/Auto (x30~x2)
Mirror	Off, Mirror, V-flip, Rotate
Motion Detection	On/Off for 4 selectable zones
Privacy Mask	On/Off for 4 selectable zones
Environmental	Indoor
Power Source	12VDC/24VAC
Power Consumption	12VDC:2W max./24VAC:1.8W max.
Operating Temperature	-10°C~50°C / 14°F~122°F
Humidity	Less than 80%
Dimensions	129 x 58 x 55mm /5.08" x2.28" x 2.17"
Weight	240g/0.53lbs
Certifications	CE/FCC/ RoHS

Specifications and designs are subject to change for improving the functionality of this product without notice.

EverFocus Electronics Corp.

EverFocus Taiwan:

12F-1, No.79, Sec. 1, Shin-Tai Wu Road,
Hsi-Chih, New Taipei City, Taiwan
TEL: +886 2 2698 2334
FAX: +886 2 2698 3943
www.everfocus.com.tw
marketing@everfocus.com.tw

EverFocus China - Beijing:

Room 609, Technology Trade Building,
Shangdi Information Industry Base,
Haidian District, Beijing 100085, China
TEL: +86 10 6297 3336~39
FAX: +86 10 6297 1423
www.everfocus.com.cn
marketing@everfocus.com.cn

EverFocus USA - California:

1801 Highland Avenue, Unit A, Duarte, CA 91010,
USA
TEL: +1 626 844 8888
FAX: +1 626 844 8838
www.everfocus.com
sales@everfocus.com

EverFocus Europe - Germany:

Albert-Einstein-Strasse 1, D-46446
Emmerich, Germany
TEL: +49 2822 93940
FAX: +49 2822 939495
www.everfocus.de
sales@everfocus.de

EverFocus China - Shenzhen:

4F, No. 2, D4 Building, Wan Yelong
Industrial Park, Tangtou Road, Shiyan,
Baoan, Shenzhen, Guangdong 518101, China
TEL: +86 755 2765 1313
FAX: +86 755 2765 0337
www.everfocus.com.cn
marketing@everfocus.com.cn

EverFocus Japan:

3F Kuramochi, BuildingII 2-2-3 Koto-Bashi,
Sumida-Ku Tokyo, 130-0022, Japan
TEL: +81 3 5625 8188
FAX: +81 3 5625 8189
www.everfocus.co.jp
info@everfocus.co.jp



Your EverFocus product is designed and manufactured with high quality materials and components which can be recycled and reused.
This symbol means that electrical and electronic equipment, at their end-of-life, should be disposed of separately from your household waste.
Please, dispose of this equipment at your local community waste collection/recycling centre.
In the European Union there are separate collection systems for used electrical and electronic product.
Please, help us to conserve the environment we live in!

Ihr EverFocus Produkt wurde entwickelt und hergestellt mit qualitativ hochwertigen Materialien und Komponenten, die recycelt und wieder verwendet werden können.
Dieses Symbol bedeutet, dass elektrische und elektronische Geräte am Ende ihrer Nutzungsdauer vom Hausmüll getrennt entsorgt werden sollen.
Bitte entsorgen Sie dieses Gerät bei Ihrer örtlichen kommunalen Sammelstelle oder im Recycling Centre.
Helfen Sie uns bitte, die Umwelt zu erhalten, in der wir leben!



EverFocus