

WDP-21BM2

1.2MP IP Miniature Bullet Camera




SPECIFICATION

Camera	
Image pick-up device	1/2.7" 1.2megapixel WDR CMOS HD sensor
Scanning system	Progressive scan
Lens	F1.8 3.6mm megapixel fixed lens
Shutter control	Rolling shutter
Sensitivity	3650 mV/Lux-sec
Video output mode	HD720p 30P
White balance	AWB / Manual
Backlight compensation	WDR
Wide dynamic range	115dB
AGC	AGC on
Adjustments	White balance / Exposure control / Color / Brightness / Sharpness
S/N ratio	More than 39dB
Video	
Compression	H.264@HP, MJPEG
Streaming	Simultaneous dual streams
	H.264 streaming over UDP, TCP, HTTP or HTTPS, MJPEG streaming over HTTP or HTTPS
Resolution	640x480, 800x480, 800x600, 1024x768, 1280x720
Frame rate	Up to 30fps@720p

DIMENSIONS

[Unit : mm]

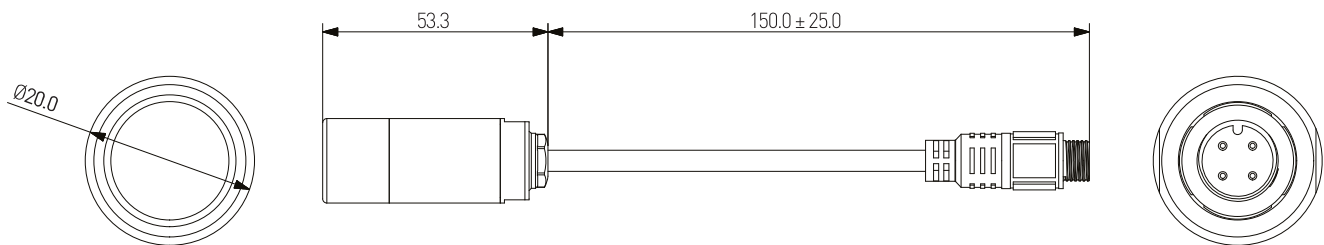

WDP-21BM2

1.2MP IP Miniature Bullet Camera



Networking	
Interface	10/100 Mbps Ethernet, RJ-45
ONVIF	Version 2.2 support
Protocols	IPv4, TCP/IP, HTTP, HTTPS, UPnP, BONJOUR RTP/RTSP, SMTP, FTP, DHCP, NTP, DNS, DDNS, SNMP
Users	8 Clients monitoring at the same time
Security	
Security	Multi-level user access with password protection
	IP address filtering
	HTTPS encrypted data transmission
Maintenance	
Firmware	Supports firmware upgrade
Dual booting	Support for firmware recovery
Factory reset	Restores to factory default settings
Applications	
Application	SDK available for application development and system integration
Connectors	
Ethernet	RJ-45 jack
Power input	DC jack
Power	
Power over Ethernet (PoE)	IEEE 802.3af
Power supply	DC 9~29V
Power consumption	Max 4W
Environmental	
Operating temperature	-30°C ~ +60°C
Humidity	10 ~ 90% RH, non condensing
Dimensions (mm)	Ø20.0 x 53.3(L)
System	
Operating system	Embedded linux

FEATURES

- Omnivision 1/2.7" CMOS HD image sensor
- Ultra miniature size
- Wide dynamic range
- Up to 30fps@720p
- Progressive scan
- DC 9~29V
- Power over Ethernet (PoE)

BRACKET OPTION



ATM Mount Bracket