



- Weatherproof high resolution 8" TFT LCD monitor
- Multiple display mode (single, split<sub>(auto)</sub>, triple<sub>(auto)</sub>, quad)
- 4 camera inputs, 1AV input, 1AV output
- Wide range input voltage (DC12V ~ 32V)
- Selectable mirror image mode
- Anti-Glare sunshield (option)
- OSD for AV source (color, brightness, contrast, tint & volume control)
- Dual compatibility for NTSC / PAL video signals
- Integrated audio speaker
- Auto scan function
- Auto power on

# SPECIFICATION

### Screen size

8.0" (diagonal)

### Display resolution

800(W) x 480(H)

### Contrast ratio

500:1

### Brightness

Max 450cd/m<sup>2</sup>

### Dot pitch (mm)

0.0736(H) x 0.2070(V)

### Active Area (mm)

176.64(W) x 99.36(H)

### Viewing angle

Left 70° / Right 70° / Up 50° / Down 70°

### Dimensions

8.7"(W) x 6.3"(H) x 1.3"(D)

### Color system


NTSC / PAL

### Power consumption

DC 12 ~ 32 volt, max 9.6W

### Operating temperature

-20°C ~ +70°C (-4°F ~ +158°F)


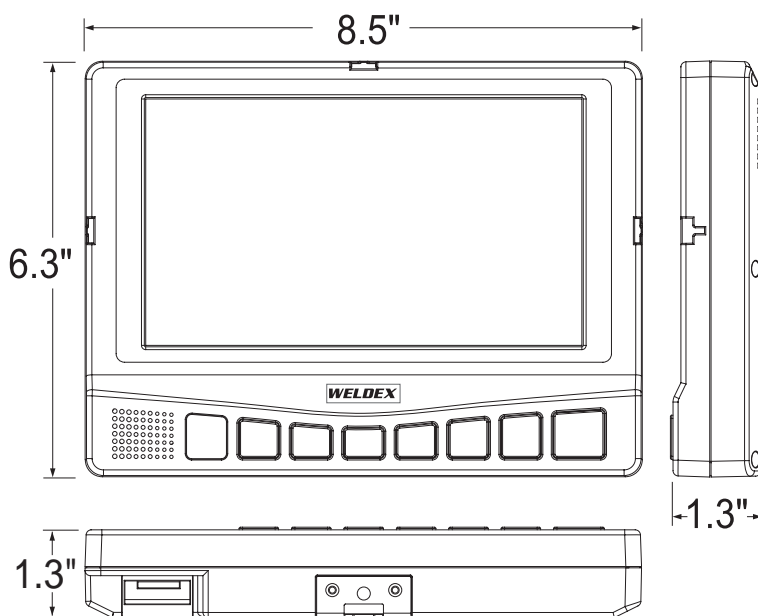


[8 Inch Series]


# 8" Color LCD Backup Monitoring System

## SYSTEM WIRING

WDRV-8464M



	Camera1	Camera2	Camera3	Camera4
WDRV-7464M/8464M	6Pin	6Pin	4Pin	4Pin
WDRV-7444M/8444M	4Pin	4Pin	4Pin	4Pin

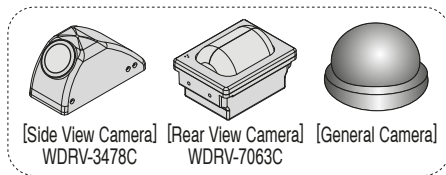

FEMALE  
MALE  
6PIN

FEMALE  
MALE  
6PIN

FEMALE  
MALE  
4PIN

FEMALE  
MALE  
4PIN

DC12V~32V  
GND

Trigger1 Signal Input  
Trigger2 Signal Input  
Trigger3 Signal Input  
Trigger4 Signal Input  
Trigger5 Signal Input

Video Out

Audio Out

Audio/ Video IN


General Camera

- WDRV-7057C (-HD)

- WDRV-7925C


- WDRV-5437CN

### WDRV-3478C Pin Connection [SIDE VIEW CAMERA]



Pin No.	Description
1	GND
2	AUDIO
3	VIDEO
4	DC +12V

### WDRV-7063C Pin Connection [REAR VIEW MOTORIZED CAMERA]



Pin No.	Description
1	VIDEO
2	DC +12V
3	MORTOR +
4	AUDIO
5	MORTOR -
6	GND