



Super Expanded
Resolution

VESA 100
and Rack Mountable

*LCD monitors offer
reliable, affordable video
and audio performance*

- Available in 17-inch and 19-inch LCD monitors
- Resolutions up to 1280 x 1024 @ 60/75 Hz
- Standard VESA 100 mount or optional rack mount kit
- 300cd/m² brightness
- Up to 700:1 contrast ratio to enhance image detail
- Audio input/output with stereo speakers
- Picture-in-picture
- Simple onscreen display menu to adjust picture controls
- Plug-and-play connectivity for cameras, DVRs and PCs
- Space-saving dimensions ideal for cramped security offices and kiosks


P1730A/P1930A

COLOR LCD MONITORS

MODEL NUMBER	P1730A	P1930A
LCD screen	17"	19"
Aspect ratio	5:4	
Resolution scan	640 x 480 @ 56/60/75 Hz 800 x 600 @ 56/60/72/75 Hz 1024 x 768 @ 60/70/75 Hz 1280 x 1024 @ 60/75 Hz	
Brightness	300cd/m2	
Contrast	500:1	700:1
Viewing angle	left 70°/right 70° up 63°/down 67°	left 70°/right 70° up 70°/down 60°
Reponse time	8ms	6ms
Sync format	NTSC/PAL	
Frequency (H)	PC: 31.5K - 80KHz Video: 15750/15625 (NTSC/PAL)	
Frequency (V)	PC: 56Hz - 75Hz Video 50/60Hz	
Input interfaces		
Video	D-SUB 15IN x 1, Video in/out x 1 (BNC)	
Audio	Audio In x 1, Audio Out x 1 (stereo)	
Input power	AC in x 1	
Termination	75ohm (auto termination)	
Built-in speakers	Stereo (right, left)	
Picture in picture	Yes	
Front panel button	AUTO, MENU, Up/Down, INPUT, POWER	
OSD language	English, French	
VESA mounting	VESA 100	
Weight	12.35lb (5.6kg)	13.89lb (6.3kg)
Dimensions		
inches	15.35 x 13.96 x 2.92	16.73 x 15.59 x 2.98
mm	390 x 354.5 x 74.2	425 x 396 x 75.6
Safety & EMI	UL, CUL, FCC/B	
Power	AC 100-240V 50/60Hz	
Power consumption	0.75 - 0.4A	0.8 - 0.4A
Operating temp	0°C to 40°C (32°F - 104°F)	
Humidity	20% - 80%	
Accessories	Power cord, VGA cable, Owners manual	
Optional accessories	HS-RM17: Rack mount bracket for P1730A HS-RM19: Rack mount bracket for P1930A	

DIMENSIONS (inches)

P1730A

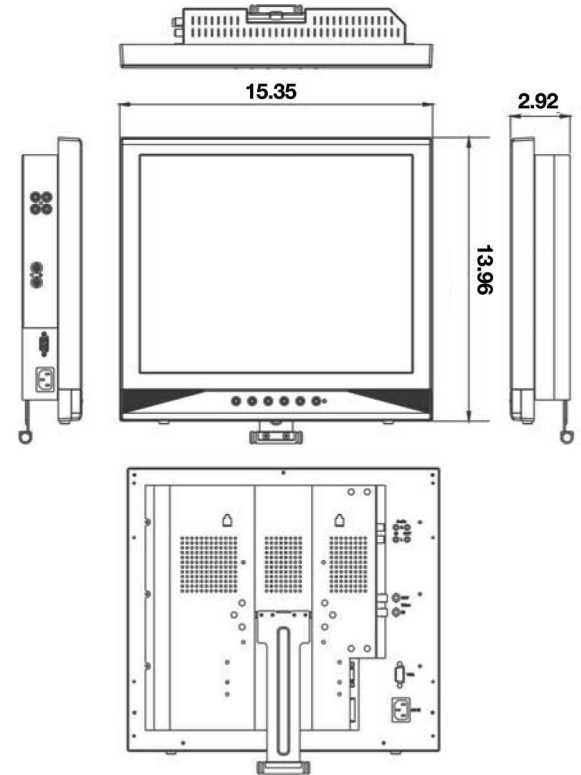

P1930A

