





VSS-52R 5x2 Matrix Switch

- Built-in microprocessor control provides touch control instant switching of five inputs and two independent outputs
- Convenient remote control enables on-the-fly selection from up to 25 feet
- Multiple video input types provide maximum interface compatibility
- Internal amplifier ensures maintenance of high quality picture
- Quick switch status provided by front panel LED (source, output, standby)
- S-Video, composite video and L/R audio patch cable provided

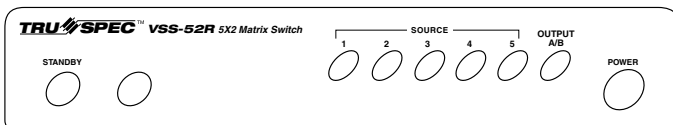

Front View

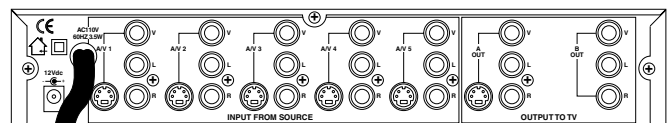

Rear View

Specifications

Frequency Range	20Hz~10MHz	Audio Impedance	47
Input Video	5 x S-video, RCA-Comp.	Power Input	120VAC
Input Audio	5 x RCA-Audio (L and R)	Power Frequency	60Hz
Output Video	2 x S-video, RCA-Comp.	Power Required	250mA
Output Audio	2 x RCA-Audio (L and R)	Dimensions	11.4"(L) x 7.3"(D) x 2.1"(H)
Video Impedance	75	Weight	1.2 kg

Ordering Information

VSS-52R 5x2 Matrix Switch