

EMX32


16CH Surveillance Signage



Features

- Decodes up to four 1080p/30fps video streams in H.264 codec simultaneously
- Decodes up to 16 IP streams
- Multiple main monitors: Separately configured HDMI and VGA (1080p) main monitor outputs
- Multiple control inputs: mouse / remote controller
- Remote configuration support from built-in web interface
- Standing mount and VESA mount supported

Dimensions

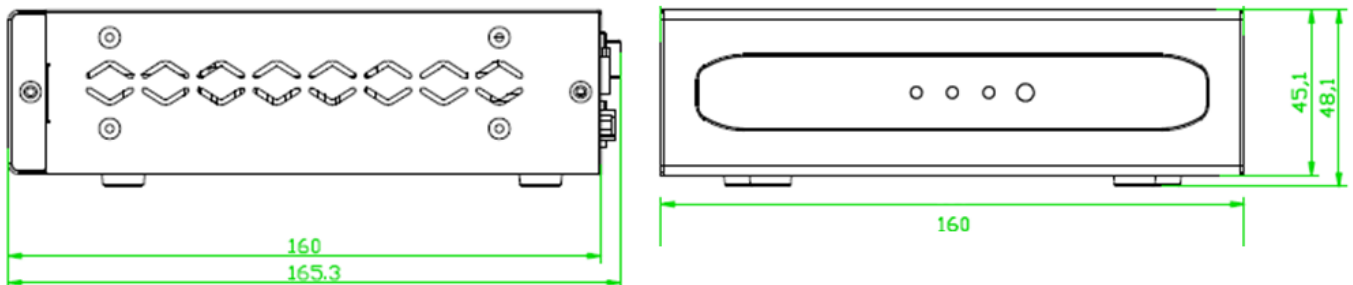

Specification

Model Name	EMX32
Number of Camera Supported	16 cameras (Max.)
Frame Rate	NTSC 120fps@1080p PAL 100fps@1080p
Video Compression Format	H.264
Performance	80 Mbps
Video Output	HDMI : 720X480, 1024X768, 1920X1080 VGA : 720X480, 1024X768, 1920X1080
Alarm In	4
Alarm Out	1
Watch Dog Timer	Yes
User Interface	GUI (Graphical User Interface)
OS	Embedded Linux
Network / Protocol	10/100Mbps Ethernet ; TCP-IP / DHCP/ PPPoE / EverFocus DDNS / RTSP / RTP / HTTP / SMTP / POP3 / SSL
Control PTZ via OSD	Yes
Dual Streaming	Yes
USB	1 USB 2.0 port (on Rear Panel)
User Access	3 Levels of user access supported
RS-485	1 RS-485
Power Source	12VDC / 5A (Max. 60 W)
Operating Temperature	0°C~40°C / 32°F~104°F (20~80% humidity)
Dimensions	160 x 160 x 45 mm ; 6.29" x 6.29" x 1.77"
Certificates	CE, FCC, RoHS
Language	English, Japanese, Traditional Chinese, Spanish, German, French, Russian, Portuguese (Brazil), Dutch, Simplified Chinese, Italian

Find Out More At:

EverFocus Taiwan HQ:

TEL: +886 2 2698 2334

www.everfocus.com.tw

marketing@everfocus.com.tw

EverFocus USA - California:

TEL: +1 626 844 8888

www.everfocus.com

sales@everfocus.com

International Branch Offices:

Germany, China, Japan

